



22 JUNE 00

The  
Patent  
Office

PCT / JB 99 / 02 07 6

24.03.00

1899 / 2076

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

09/868024

INVESTOR ENTERPRISE

REC'D 10 APR 2000  
The Patent Office  
Cowbridge House PCT  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Evans*

Dated 21 December 1999

is Page Blank (uspto)

Act 1977

14 DEC 1998  
The Patent Office

098 E411887-10 000068  
01/7700 0.00 9827505.0

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

9827505.0

1. Your reference	87376/PRS/VU		
2. Patent application number (The Patent Office will fill in this part)			
3. Full name, address and postcode of the or of each applicant (underline all surnames)	NOKIA TELECOMMUNICATIONS OY KEILALAHDENTIE 4 02150 ESPOO FINLAND		
Patents ADP number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	FINLAND	06208193006	
4. Title of the invention	LOCATING SYSTEM FOR MOBILE STATIONS		
5. Name of your agent (if you have one)	PAGE WHITE & FARRER		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	54 DOUGHTY STREET LONDON WC1N 2LS UNITED KINGDOM		
Patents ADP number (if you know it)	1255003	✓	
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body See note (d))	YES		

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	12
Claim(s)	3
Abstract	1
Drawing(s)	5

8  
+ 5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date



14 DEC 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

P R SLINGSBY

0171 831 7929

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

## LOCATING SYSTEM FOR MOBILE STATIONS

This invention relates to a system for estimating the locations of mobile stations in a cellular radio system. For example, the mobile stations could be mobile telephones in a cellular telephone system.

Figure 1 is a simplified schematic diagram of the radio coverage in an area of a cellular radio network. A number of base-stations 1 to 9 are distributed over the area. Each base-station has one or more base-station transceivers which can transmit and receive radio signals to and from mobile stations. Each base-station transceiver transmits to and receives from a limited area, which represents the cell associated with that base-station transceiver. Figure 1 shows cells 10-19. When a mobile station is in a cell it communicates with the base-station transceiver associated with that cell. As shown in Figure 1, the cells vary in size and shape depending on factors such as the directionality, transmit power and receive sensitivity of the base-station transceiver, and the topography around the base-station. For example, cells 10 and 11 are relatively large and surround their respective base-stations 1 and 2 generally evenly - these represent typical cells in a rural area; cells 12 and 13 are elongate and extend in opposite directions along a main road 22 from a single base-station 3; cells 14-18 are very small - these are typical cells in an urban area.

In a typical cellular radio system the transmissions of each mobile station must be synchronised with the timing of its current base-station. As the mobile moves closer to the base-station its transmissions take less time to reach the base-station; therefore, to maintain synchronisation, it delays its transmissions increasingly (under command from the base-station) as it approaches the base-station. For example, in the GSM cellular telephone system once a connection has been established between a base-station and a mobile station the base-station continually measures the time offset between its own clock and the timing of the signals received from the mobile station. Based on these measurements it calculates a timing advance from 0

to 233  $\mu$ s, coded as a number from 0 to 63 which it transmits regularly to the mobile station. The base-station therefore knows the timing advances (TAs) for all the active mobile stations in its cells.

Since the timing advance is largely determined by the speed of radio propagation (which is known) and the distance of the mobile from the base-station it might be expected that knowledge of the TAs could allow the system to estimate the geographical locations of the mobile stations. For example, where several cells overlap it might be expected that triangulation using the cells' TAs could permit estimation of a mobile's position. However, such schemes have met with many practical difficulties (such as coping with time delays caused by reflected signals) which have made the schemes too complex for widespread implementation.

There is thus a need for a more easily implemented system to allow the geographical location of a mobile station to be determined.

According to one aspect of the present invention there is provided a method for estimating the location of a mobile unit in a cellular radio system, comprising: identifying a cell of the system in which the mobile unit is located; estimating the distance of the mobile unit from the base-station of the cell; determining the location of the base-station; determining bearing information associated with the cell, the bearing information defining a direction; and calculating a location offset from the base-station by the said distance in the said direction to estimate the location of the mobile unit.

In one preferred arrangement the said cell is a cell of a first type and the method comprises the step of, if the mobile station is located in a cell of a second type, estimating the location of the mobile unit to be the location of the base-station of that cell of the second type. The first type of cell may be a cell of generally elongate coverage area. The second type of cell may be a cell of generally non-elongate coverage area.

Preferably the method comprises determining whether the cell in which the mobile unit is located is of the first type or the second type. This may be done on the basis of a stored indication of the type of each cell.

The bearing information is preferably independent of the location of the mobile unit within the cell. The bearing information preferably indicates a direction in which the coverage area of the cell is elongate.

The distance of the mobile unit from the base-station is suitably estimated by means of synchronisation information of the cellular radio system. One example of such synchronisation information is timing advance information. Thus, the synchronisation information suitably represents a timing offset between the mobile station and the base-station.

Once the location has been estimated further action such as processing or sending of messages may be performed to utilise the location information. For example, a message may be sent to the mobile station in dependence on the estimated location. Such a message suitably indicates the estimated location and/or indicates the result of processing based on the estimated location. Such a message may be sent by, for instance, a voice format or a data format such as a text message format. One example of such processing is the calculation of a route between a certain location and the estimated location of the mobile station. That certain location may be received from the mobile itself, for example if the user of the mobile has initiated the calculation of a route to that location.

The estimation of the mobile's location is suitably initiated by a message from the mobile requesting estimation of its location and/or by the elapse of a predetermined time from an event such as the last estimation of the mobile's location.

According to a second aspect of the present invention there is provided a locating unit for estimating the location of a mobile unit in a cellular radio system, the unit being connected to the cellular radio system for reception of information identifying a cell of the system in which the mobile unit is located and information indicative of the distance of the mobile unit from the base-station of the cell, the locating unit comprising: data storage means storing the location of the base-station and bearing information associated with the cell, the bearing information defining a direction; and location calculating means for calculating a location offset from the base-station by the said distance in the said direction as an estimate of the location of the mobile unit.

The data storage means suitably stores cell type information associated with the cell, the cell type information indicating whether the bearing information is to be used in estimating the location of a mobile unit in the cell.

The unit may also comprise logic means for, in dependence on the cell type information, causing the location calculating means either: if the said cell is a cell of a first type, to calculate a location offset from the base-station by the said distance in the said direction as an estimate of the location of the mobile unit; or if the said cell is a cell of a second type, to take the location of the base-station as an estimate of the location of the mobile unit. The unit may also comprise messaging means for generating a message in dependence on the estimated location for transmission to the mobile unit.

According to a third aspect of the present invention there is provided a locating unit for reporting the location of a mobile unit in a cellular radio system, the unit being connected to the cellular radio system for reception of information identifying a cell of the system in which the mobile unit is located and information indicative of the distance of the mobile unit from the base-station of the cell, the locating unit comprising: data storage means storing descriptive information associated with one or more possible distances of a



mobile unit from the base-station of the cell; and location reporting means for generating a report on the location of the mobile unit based on the descriptive information that corresponds to the distance of the mobile unit from the base-station of the cell.

The descriptive information may suitably include place name information and/or road name information and/or distance information. The location reporting means preferably transmits the report to the mobile unit.

In each aspect of the invention the mobile unit may, for example, be a radio telephone.

The present invention will now be described by way of example with reference to the accompanying drawings, in which:

figure 1 illustrates cell coverage in a cellular telephone system;

figure 2 shows a schematic diagram of a cellular telephone system;

figure 3 is a flow diagram of the procedure for locating a mobile station;

figure 4 is a schematic diagram of a the environment of a cellular telephone system; and

figures 5 and 6 show schematic diagrams of architectures for implementing a locating system in a GSM network.

The system of figure 2 includes a mobile locating unit (MLU) 30 connected to base-stations 1 to 9 of figure 1 via mobile service centres (MSCs) 31 to 34. The MLU has access to information from the base-stations and data stored in a coverage database 35a and uses them to estimate the geographic location of mobile stations 36,37 (e.g. cellular telephone handsets) in the system. The basic principle used to locate the mobile stations is as follows. The database 35a stores, for each cell, the geographic location of that cell's base-station and an indication of, when a mobile station is in that cell, whether or not the mobile station's timing advance should be used to estimate the mobile station's location. For the cells for which timing advance is to be used to

estimate mobile station location the database also stores bearing data, which indicates the compass bearing from the cell location that mobiles in that cell will be assumed to lie on. Then to estimate the location of a mobile station the MLU determines via the MSCs which cell the mobile is currently in. The MLU consults the information on that cell that is stored in the database 35a. If the database indicates that timing advance (and bearing data) should not be used to estimate the locations of mobiles in that cell then the MLU estimates the mobile station's location to be the location of the base-station associated with that cell. If the database indicates that timing advance (and bearing data) should be used for locating mobiles in that cell then the MLU obtains from the database the bearing data for that cell and obtains from the base-station associated with that cell the mobile station's timing delay. The timing advance is converted to a distance using the known speed of propagation of the radio signals, and the location of the mobile station is estimated as being at a position offset from the base-station by that distance in the direction defined by the bearing information.

The process is illustrated by the flow diagram in figure 3.

The indication of whether the timing delay / bearing data is to be used for any base-station could be stored separately from the bearing data itself, or a special value of the bearing data for a base-station (e.g. 400°) could be used to indicate that the timing delay / bearing data is not to be used for that base-station.

The process of estimating the mobile's location could be initiated by the sending of a message from the mobile to the MLU over the radio system.

The cells for which the database defines that the TA should be used in locating are elongate cells (such as cells 12 and 13 in figure 1), for which the corresponding bearing data defines the compass bearing along which the

elongation of the cell extends from the associated base-station. The other cells are those for which the TA is not used in locating.

Therefore, referring to figure 1, if the mobile is in one of the cells 14 to 18 its location will be estimated to be the location of the respective base-station 5,8,9,7,6. Since these cells are small in area and centred on their respective base-station the estimate of location will be relatively accurate. If the mobile is in one of the cells 12,13 its location will be estimated using the TA to lie at a point along the major axis of the cell. Since these cells are narrow perpendicular to that axis the estimate of location will again be relatively accurate, subject to errors due to disproportionality of the TA with distance from the base-station caused by factors such as reflection of signals. If the mobile is in one of the cells 10,11,19 then its location will be approximated to be the location of the respective base-station 1,2,4. This is relatively inaccurate but since these are rural cells, in many networks a typical mobile will only rarely occupy such a cell. The present system therefore provides a greatly simplified method of locating mobiles, with relatively little loss in performance over much more complex systems.

The process of calculating an estimate of a mobile's location from its timing advance will now be described. Using a normal orthogonal geographical grid system the location of a base-station (e.g. base-station 3 in figure 1) can be indicated as co-ordinates  $x_b$ ,  $y_b$ , where  $x_b$  is a northing and  $y_b$  is an easting. The bearing data for the relevant cell can be indicated as  $\theta$  degrees from north and the mobiles' timing delay can be indicated as  $t$  seconds. Taking the speed of radio signals to be  $v = 3 \times 10^8 \text{ ms}^{-1}$  the mobile's distance  $d$  from the base-station is estimated by:

$$d = v t$$

and the co-ordinates of the mobile's estimated location are  $x_m$ ,  $y_m$ , where:

$$x_m = x_b + d \cos \theta$$

$$y_m = y_b + d \sin \theta$$

Once the location of the mobile station has been determined the MLU can transmit that information to the mobile station or another unit. Some convenient ways for this to be done are by text or voice messages over the radio system. For instance, in a GSM system text messages could be sent by SMS (short message service) or USSD (unstructured supplementary services data).

The MLU (or another unit having received the location information) could perform further processing based on the location information together, optionally, with other information such as information derived from a geographical database 35b. The geographical database could, for example, store the locations of geographical features such as towns and roads: one example of such a database is the Finnish Genimap system. Examples of the further processing that is possible are as follows:

1. The MLU could determine the location of the mobile relative to geographical features in the database and generate a message to report the location relative to those features, such as "you are in town X" or "you are between towns X and Y" or "you are 5km from town X on road Z".
2. If the MLU is capable of receiving messages from a user of the mobile (e.g. by the SMS system) the user could, by means of a message, request the MLU to use its database to perform a calculation and report the result by a message. For example, the user could request the MLU to suggest a route from the mobile's location to a specified location, or to calculate the distance from the mobile's location to a specified location. The MLU could also suggest a route from the mobile's current location to a present location such as the mobile user's home. The mobile user's home location could be determined by the MLU from information available from the radio network's billing centre or subscriber database. Using estimates of driving speeds and travel costs the MLU could report estimated journey times and costs for suggested routes.
3. The MLU could (e.g. following a request by the user) send messages periodically (e.g. every 15 minutes) to report the mobile's location.

Figure 4 illustrates a specific example of location estimations. Figure 4 shows the A616 road extending between the towns of Olvila and Kosula and covered by an elongate radio cell from a base-station 38. The base-station measures and calculates the timing advance for the mobile station and gets the value 21. This value 21 corresponds to a distance of 8km from the base-station 37 at Turpela. So the location of the mobile station is 12km (4km + 8km) from Olvila, and 13km (21km - 8km) from Kosula. By monitoring the mobile's location over time the direction of movement of the mobile along the road/cell can be determined.

If the user asks to know the distance to some far away place, for example Hauho, we need to compare the distance from Hauho to Olvila and from Hauho to Kosula. The shorter way (= Kosula - Hauho plus 12km) will be informed to the user and it will also be used for route assistance. The mobile station user could get a message "you are in Aavasaksa (A616), 12km from Olvila and 13km from Kosula, you have 583km to

go to Hauho, Do you want route assistance?" To simplify the integration of the coverage database 35a with the geographic database 35b the locations of base-stations could be approximated to geographic locations already held in the geographic database. Alternatively, the two databases could use a common geographical grid system or the MLU could translate between different grid systems used by the databases. In some cases supplementary locations could be added to the geographic database, also to assist in calculating routes and distances.

Another alternative avoids the need for the storage of bearing information. One of the databases could store a list of descriptive information to each or to a range of timing advances. Once the location of a mobile station had been determined a description of the mobile station's location based on that descriptive information could be reported to a user. In the example of figure 4, the table could hold the following information:

Timing Advance	Place	City 1	City 2	Road
0 to 7	Turpela	Ovila	Kosula	A616
8 to 16	Jankhala	Ovila	Kosula	A616
17 to 22	Aavasaksa	Ovila	Kosula	A616
23 to 35	Perala	Ovila	Kosula	A616
over 35	Kosula	Kosula	Kosula	A616

City 1 and city 2 are major places between which the mobile station's location lies.

Examples of descriptions based on this information that could be reported to a user at timing advance 10 are:

"You are in Jankhala on the A616"

or (by calculation of the distance corresponding to a certain timing advance and knowledge of the distance of the base station from city 1 and city 2):

"You are in Jankhala (A616) 9 kilometres from Ovilva and 16 kilometres from Kosula".

For non-linear cells, or in general cells for which the distance of the mobile unit from the base station is not to be taken into account in generating a report of the mobile

station's location, the corresponding table could hold merely a single set of location data describing, for example, the central point of the cell.

Figures 5 and 6 show some schematic architectures for implementing this system in a GSM cellular telephone network. Like reference numbers refer to like units in these figures and figure 2. In figure 5 the MLU 30 is connected to the network via a messaging unit 39 that allows bi-directional SMS or USSD message traffic between the MLU 30 and mobile 36. In figure 6 there is also a messaging platform 41 that acts as a gateway between the messaging unit 39 and a network 40, such as the internet, via which the MLU 30 is connected to the cellular network.

It will be appreciated that the present invention is especially advantageous in connection with in-vehicle mobile cellular radio mobile units. The mobile unit could be a mobile telephone or another mobile communication unit. The cellular network could be a cellular telephone network.

The invention may also be implemented with the proposed GPRS (general packet radio service). The proposed GPRS standards define support for a short message service centre and the GPRS radio interface also makes use of calculated/measured timing advances. The high data rates (40-100kb/s) available through GPRS could allow for more convenient use of data-intensive functionality. For example, having estimated the location of a mobile station the MLU could transmit information to the mobile station to allow it to display a map of its surroundings. Of course, such a feature could be implemented, albeit less conveniently, in systems having lower data rates. In the GPRS system messages to or from the mobile unit and/or the MLU could be sent via the SGSN (serving GPRS support node) or the MSC (mobile switching centre).

Signal strength information may be used either instead of or in combination with the timing advance information to estimate the distance of the mobile from the base-station.

The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof, irrespective of

whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.



**CLAIMS**

1. A method for estimating the location of a mobile unit in a cellular radio system, comprising:
  - identifying a cell of the system in which the mobile unit is located;
  - estimating the distance of the mobile unit from the base-station of the cell;
  - determining the location of the base-station;
  - determining bearing information associated with the cell, the bearing information defining a direction; and
  - calculating a location offset from the base-station by the said distance in the said direction to estimate the location of the mobile unit.
2. A method as claimed in claim 1, wherein the said cell is a cell of a first type and the method comprises the step of, if the mobile station is located in a cell of a second type, estimating the location of the mobile unit to be the location of the base-station of that cell of the second type.
3. A method as claimed in claim 1 or 2, wherein the method comprises determining whether the cell in which the mobile unit is located is of the first type or the second type.
4. A method as claimed in any preceding claim, wherein the bearing information is independent of the location of the mobile unit within the cell.
5. A method as claimed in any preceding claim, wherein the distance of the mobile unit from the base-station is estimated by means of synchronisation information of the cellular radio system.
6. A method as claimed in claim 5, wherein the synchronisation information represents a timing offset between the mobile station and the base-station.
7. A method as claimed in any preceding claim, comprising the step of sending a message to the mobile station in dependence on the estimated location.

8. A method as claimed in any preceding claim, comprising the step of receiving a message from the mobile requesting estimation of its location.

9. A method as claimed in any preceding claim, comprising the steps of receiving information defining a location; and calculating a route between that location and the estimated location of the mobile station.

10. A locating unit for estimating the location of a mobile unit in a cellular radio system, the unit being connected to the cellular radio system for reception of information identifying a cell of the system in which the mobile unit is located and information indicative of the distance of the mobile unit from the base-station of the cell, the locating unit comprising:

data storage means storing the location of the base-station and bearing information associated with the cell, the bearing information defining a direction; and

location calculating means for calculating a location offset from the base-station by the said distance in the said direction as an estimate of the location of the mobile unit.

11. A unit as claimed in claim 10, wherein the data storage means stores cell type information associated with the cell, the cell type information indicating whether the bearing information is to be used in estimating the location of a mobile unit in the cell.

12. A unit as claimed in claim 11, comprising logic means for, in dependence on the cell type information, causing the location calculating means either:

if the said cell is a cell of a first type, to calculate a location offset from the base-station by the said distance in the said direction as an estimate of the location of the mobile unit; or

if the said cell is a cell of a second type, to take the location of the base-station as an estimate of the location of the mobile unit.

13. A unit as claimed in any of claims 10 to 12, comprising messaging means for generating a message in dependence on the estimated location for transmission to the mobile unit.

14. A locating unit for reporting the location of a mobile unit in a cellular radio system, the unit being connected to the cellular radio system for reception of information identifying a cell of the system in which the mobile unit is located and information indicative of the distance of the mobile unit from the base-station of the cell, the locating unit comprising:

data storage means storing descriptive information associated with one or more possible distances of a mobile unit from the base-station of the cell; and

location reporting means for generating a report on the location of the mobile unit based on the descriptive information that corresponds to the distance of the mobile unit from the base-station of the cell.

15. A unit as claimed in claim 14, wherein the descriptive information comprises place name information.

16. A unit as claimed in claim 14 or 15, wherein the descriptive information comprises road name information.

**ABSTRACT****LOCATING SYSTEM FOR MOBILE STATIONS**

A method for estimating the location of a mobile unit in a cellular radio system, comprising: identifying a cell of the system in which the mobile unit is located; estimating the distance of the mobile unit from the base-station of the cell; determining the location of the base-station; determining bearing information associated with the cell, the bearing information defining a direction; and calculating a location offset from the base-station by the said distance in the said direction to estimate the location of the mobile unit.

Figure 2

Fig. 1



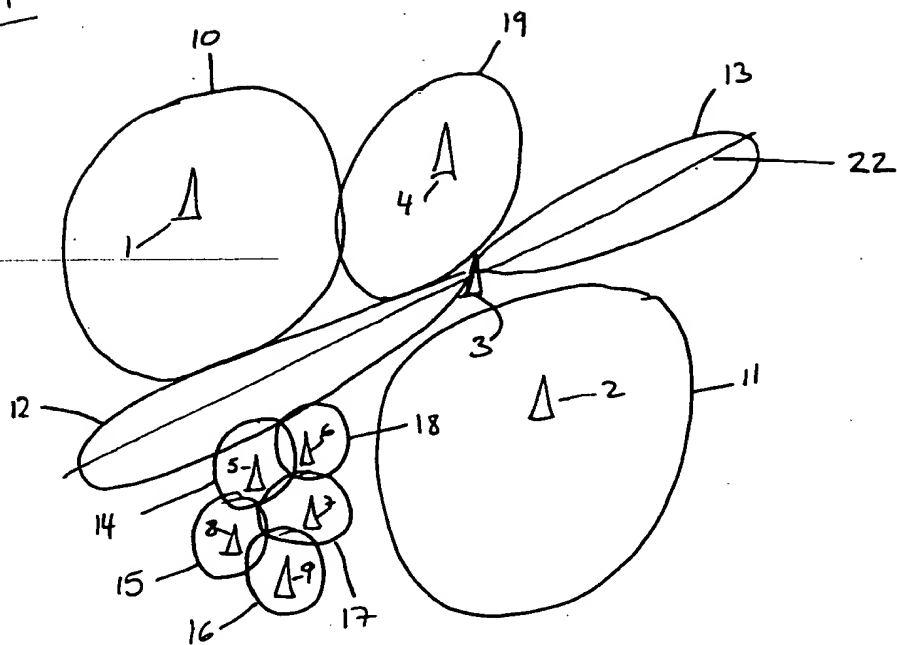


Fig. 2

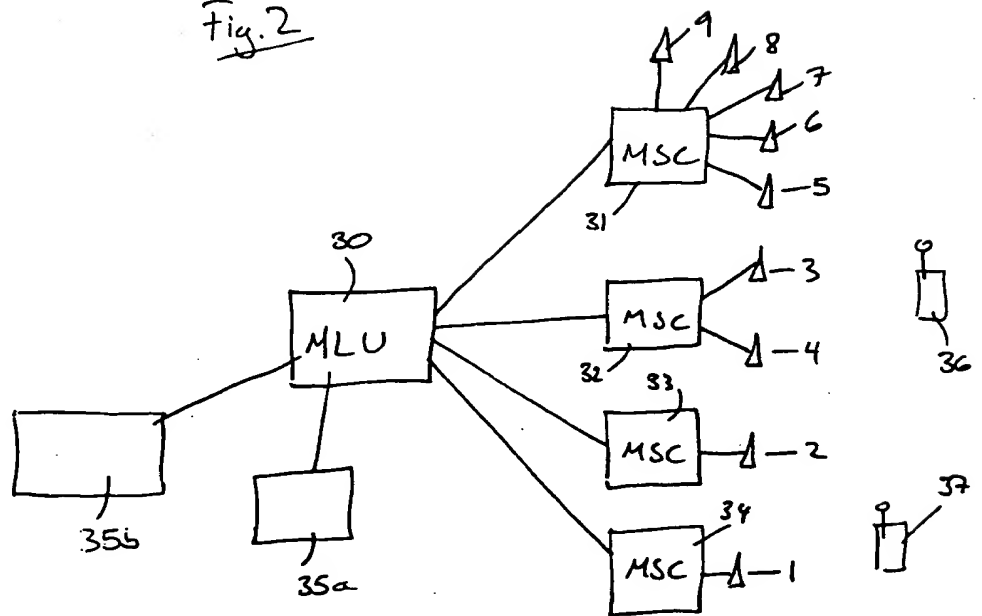

**This Page Blank (uspto)**


Fig. 3

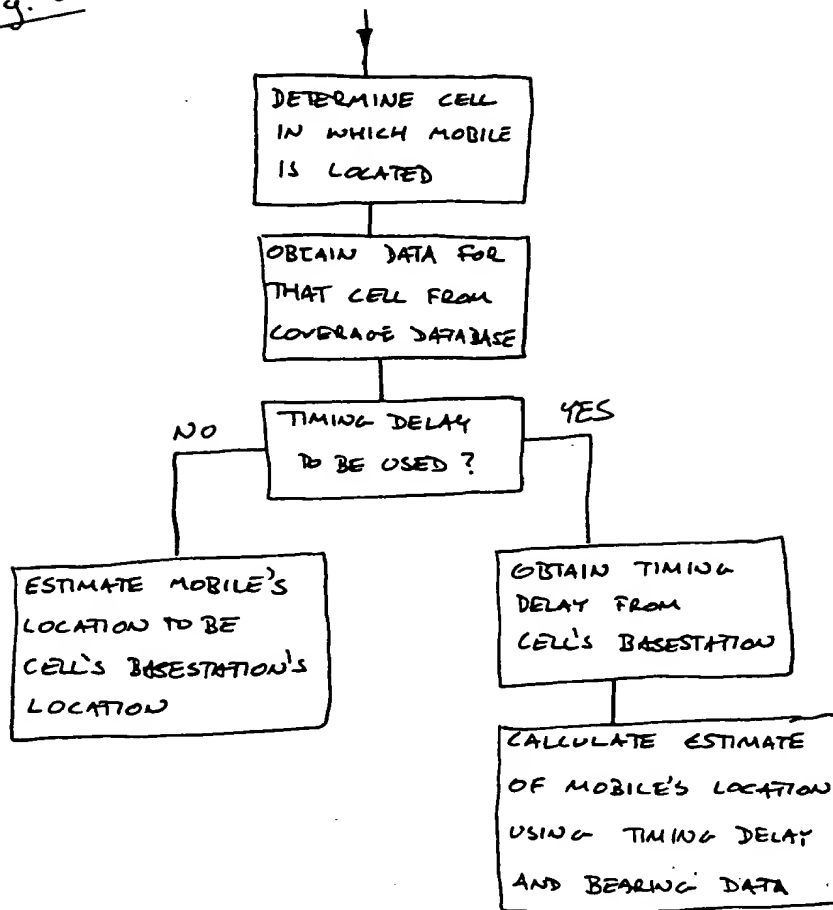

**This Page Blank (uspto)**




Fig. 4

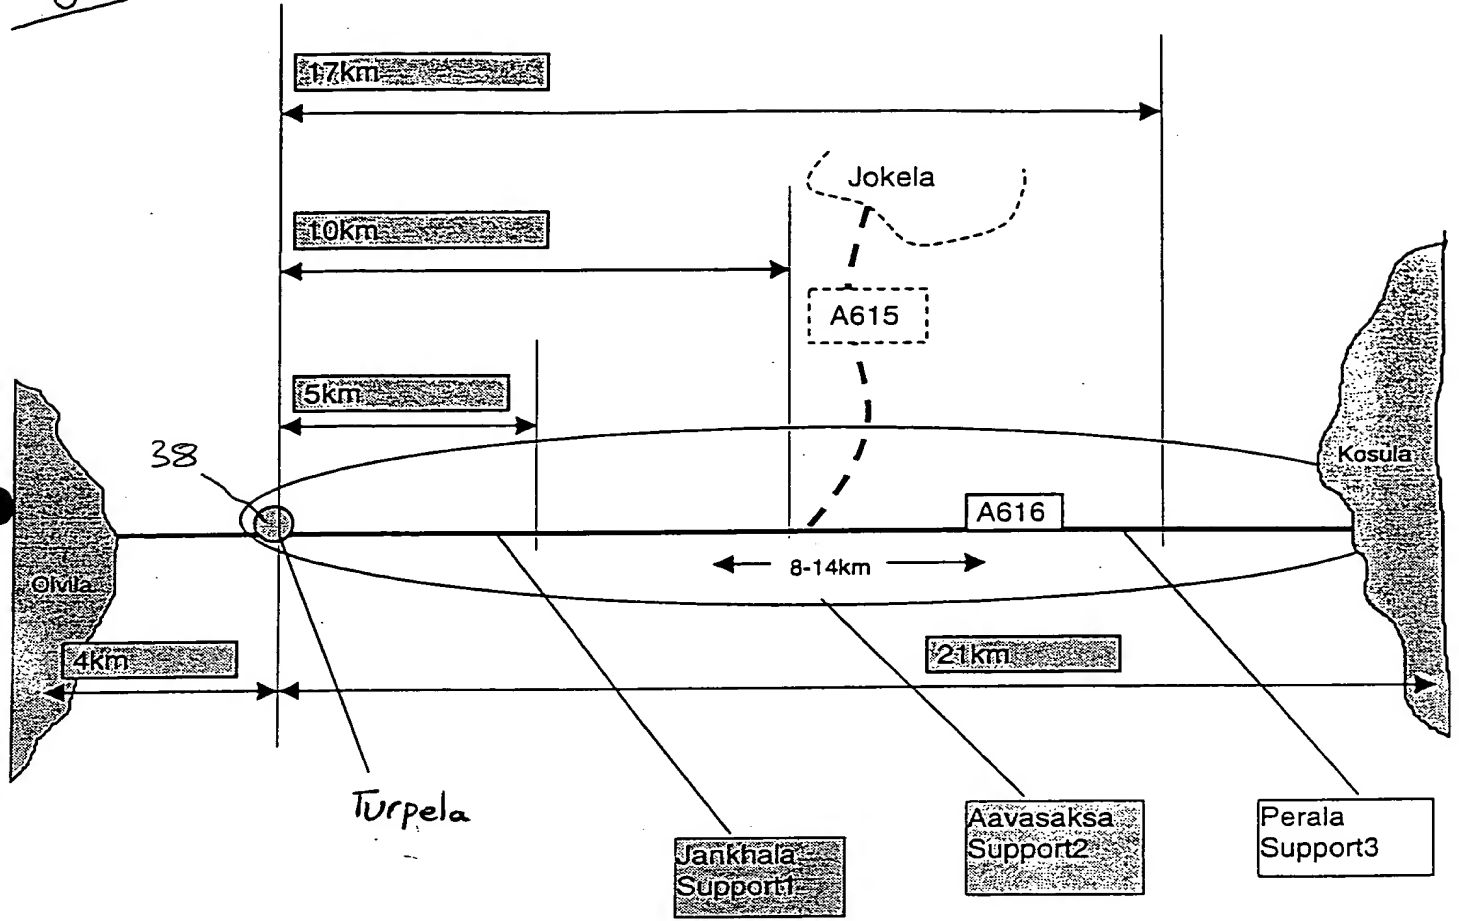

Base Station	Turpela
	TA = 0 - 8, 0 - 3 kms
Neighbour1	Omla
	4km
Neighbour2	Kosula
	21km
Support1	Jankhala
	TA = 8 - 20, 3 - 8 kms
Support2	Aavasaksa
	TA = 21 - 32, 8 - 14 kms
Support3	Perala
	TA = 33 - 45, 14 - 19 kms
Road	A616


this Page Blank (uspto)

Fig. 5

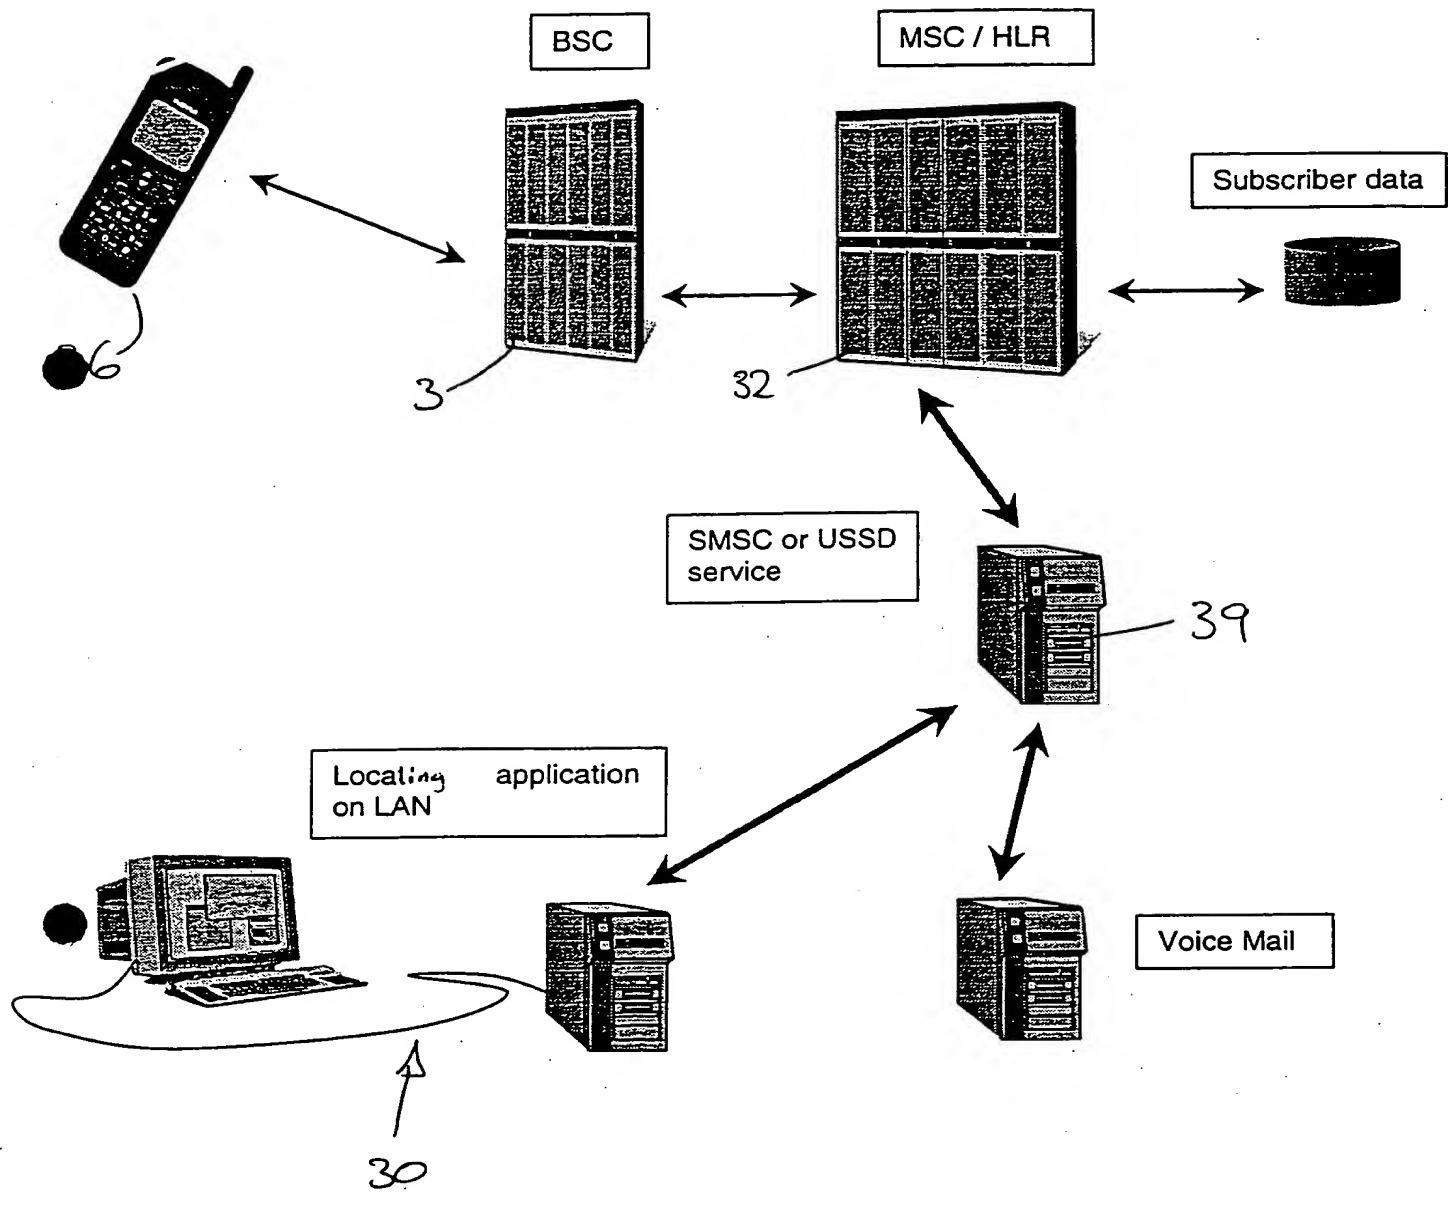

**This Page Blank (uspto)**

Fig. 6

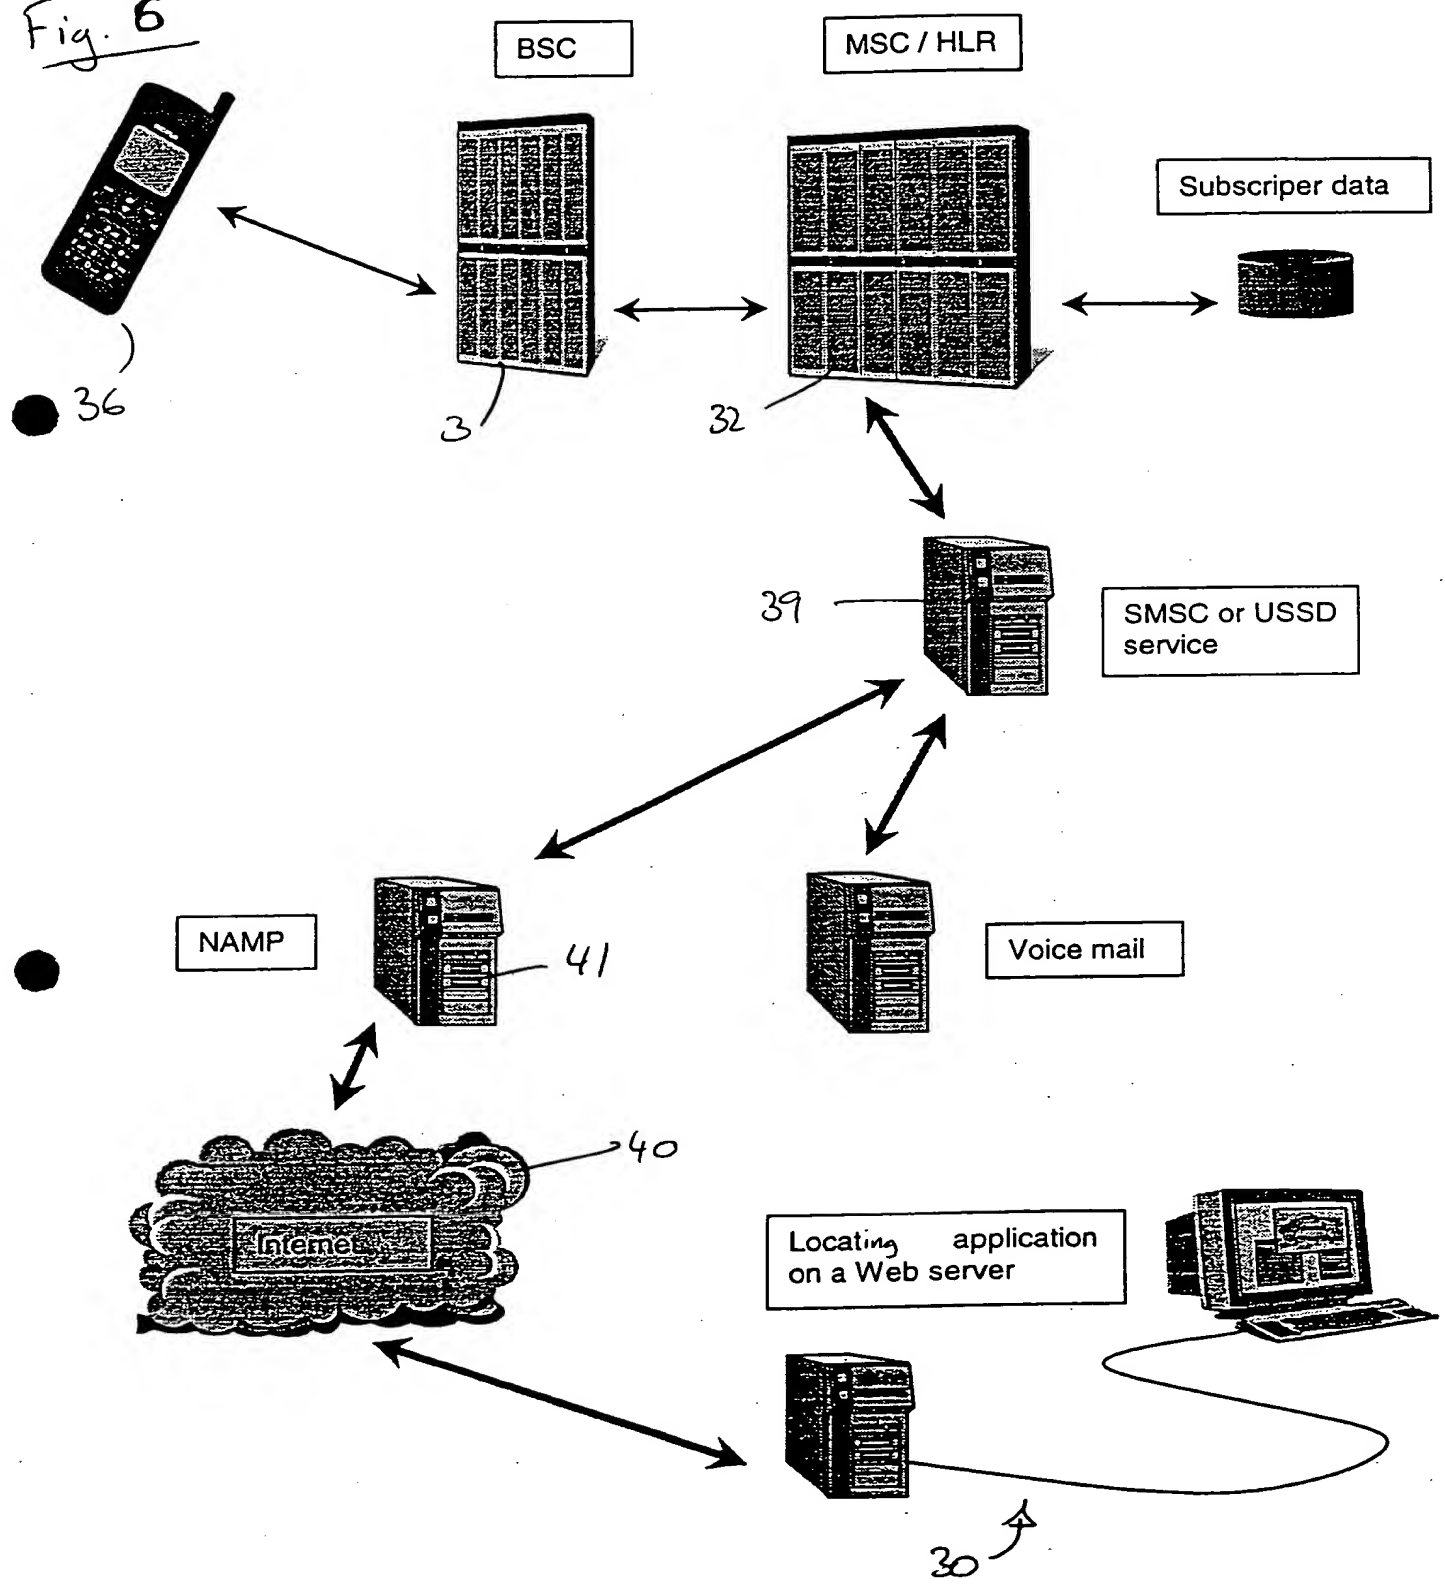

**This Page Blank (uspto)**